


## Nexus Stainless Steel MIG Wire

- Corrosion and acid resistant
- Precision layer wound
- Plastic coated metal spools
- BS EN 12072: 2000
- AWS A5.9

**Nexus Stainless Steel MIG Wire is also available in 200kg Bulk Pack**

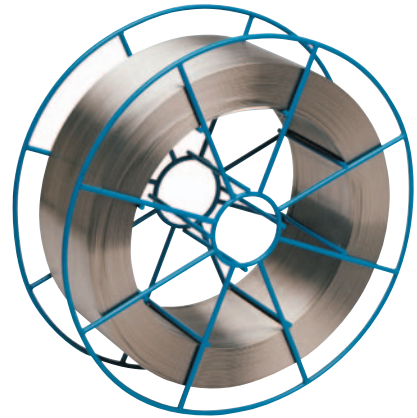

### MIG Wires – Stainless Steel

Product	Features	Specification	Part No.	Description	UOM
<b>308LSi</b>	<ul style="list-style-type: none"> <li>• A general purpose wire for welding AISI 304L and equivalent grades</li> <li>• High Silicon content for minimal spatter and excellent weld metal fluidity</li> </ul>	G 19 9 L ER308LSi	<b>NXSS010108</b>	0.8mm 15kg	Reel
			<b>NXSS010110</b>	1.0mm 15kg	Reel
			<b>NXSS010112</b>	1.2mm 15kg	Reel
<b>309LSi</b>	<ul style="list-style-type: none"> <li>• A general purpose wire for dissimilar welding and buffer layers</li> <li>• High Silicon content for minimal spatter and excellent weld metal fluidity</li> </ul>	G 23 12 L Si ER309LSi	<b>NXSS010208</b>	0.8mm 15kg	Reel
			<b>NXSS010210</b>	1.0mm 15kg	Reel
			<b>NXSS010212</b>	1.2mm 15kg	Reel
<b>316LSi</b>	<ul style="list-style-type: none"> <li>• A general purpose wire for welding AISI 316L and equivalent grades</li> <li>• High Silicon content for minimal spatter and excellent weld metal fluidity</li> </ul>	G 19 12 3 L Si ER316LSi	<b>NXSS010308</b>	0.8mm 15kg	Reel
			<b>NXSS010310</b>	1.0mm 15kg	Reel
			<b>NXSS010312</b>	1.2mm 15kg	Reel

### MIG Wires – Special Stainless Steel

Product	Features	Specification	Part No.	Description	UOM
<b>347Si</b>	<ul style="list-style-type: none"> <li>• A general purpose wire for welding AISI 321, 347 and equivalent grades</li> <li>• High Silicon content for minimal spatter and excellent weld metal fluidity</li> </ul>	G 19 9 Nb ER308LSi	<b>NXSS010408</b>	0.8mm 15kg	Reel
			<b>NXSS010410</b>	1.0mm 15kg	Reel
			<b>NXSS010412</b>	1.2mm 15kg	Reel
<b>310</b>	A 25% Cr 20% Ni wire for welding AISI 310 steels	G 25 20 ER310	<b>NXSS010610</b> <b>NXSS010612</b>	1.0mm 15kg 1.2mm 15kg	Reel Reel
<b>410</b>	A 12% Cr wire for welding AISI 403, 410 and equivalent grades	G 25 20 ER310	<b>NXSS010810</b> <b>NXSS010812</b>	1.0mm 15kg 1.2mm 15kg	Reel Reel

### Wear Resistant – Stainless Steel

Product	Features	Specification	Part No.	Description	UOM
<b>307Si</b>	A general purpose wire for buffer layers deposit will work harden	AWS A5.9 ER307	<b>NXSS010510</b>	1.0mm 15kg	Reel
			<b>NXSS010512</b>	1.2mm 15kg	Reel
			<b>NXSS010516</b>	1.6mm 15kg	Reel

### MIG Wires – Nickel Alloy

Product	Features	Specification	Part No.	Description	UOM
<b>182</b>	A High Nickel CR Nb alloy widely used dissimilar welding and joining Inconel 600 type alloys	AWS A5.14 ERNiCr-3	<b>NXNA010108</b>	0.8mm 15kg	Reel
			<b>NXNA010110</b>	1.0mm 15kg	Reel
			<b>NXNA010112</b>	1.2mm 15kg	Reel
<b>625</b>	A High Nickel CR Mo alloy widely used for cladding, dissimilar welding and joining Super Austentic 254SMo type sheets	AWS A5.14 ERNiCrMo-3	<b>NXNA010208</b>	0.8mm 15kg	Reel
			<b>NXNA010210</b>	1.0mm 15kg	Reel
			<b>NXNA010212</b>	1.2mm 15kg	Reel